
Ki Mobility Catalyst 5 Express Script




Customer Details						
Client						
Assessor						
Organisation						
	ACC		МОН		Other	
User Weight						

Ki Mobility Catalyst 5 Express Script

Please note: If you only require specifications that fall under the Standard Express Package, you do not need to fill in the reverse page.

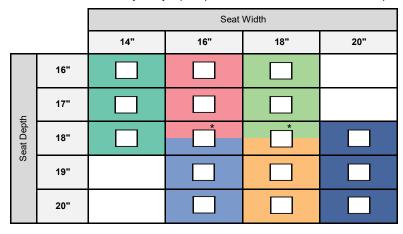

Express Codes



* Size 16"x 18" & 18"x18" can be made from multiple frames Check with TPS for preference.

Express Package: (Select optional specifications and alternatives on reverse)

- · Transit tie downs
- Standard cross brace
- Depth and height adjustable backcane medium
- · Tension adjustable back upholstery with standard cover
- \bullet 80° legrest hanger / front frame bend
- Extension tube hangers medium
- 4 way in line hanger release
- Aluminium angle adjustable footplates
- 5" castors 1.5" soft roll aluminium
- Performance castor housing
- Push to lock flush wheel locks
- 24in Maxx Spoke Performance Pneumatic Black 1 1/2" padded auto buckle Wheels
- · Natural fit standard omit thumb grip
- Quick release axles
- Height adjustable T-arm armrests with desk arm pads
- · Rear anti-tips
- · Iridescent Navy Frame
- · Centre of gravity centre
- · 2° Rear wheel camber

Please note: Express Package includes some upcharge products.

Choose Your Specifications (No addition	onal codes are required on the below parts)
Backrest Height	Rear Seat Height (must be filled in for both standard and non-standard express scripts)
16" 17" 18"	15" 15.5" 16" 16.5"
19" 20" Refer to box #1	17" 18.5"
Front Seat Height	Seat to Footrest Length
18" 18.5" 19"	13" 14" 14.5"
Refer to box #5	15" 15.5" 16" 16.5"
	17" Refer to box #4

Other specifications are available on reverse as a non-standard express package.

Optional Specifications								
Backrest Height 1	Adjustable Heel Loops 8							
Swap to Tall 20" 21" 22" 24"	14-17W (.ULCATHL1417) 18-20W (.ULCATHL1820)							
Backrest Upholstery 2	Wheel Locks 9							
Omit back upholstery Leg Hanger 3 70° (.ULCATLEG70NAVY)□ Omit Hanger	Push to lock mount (.ULCATWLKPTL) Extension handles (.ULCATWLKEXT) (Only available with above or grade aids) Low profile scissor locks (.ULCATWLKLPS) Grade aids (.ULCATWLKGA)							
Leg Hanger 4	Push Rim Options 10							
Short (please specify): 11" 11.5" 12" 12.5" 70° (.ULCATSTF70S) 80° (.ULCATSTF80S) Long (please specify): 17.5" 18" 18.5" 19"	Plastic coated push rim (KI112821) Std aluminum push rim (KI200349) Thumb grip regular (KI100795) Rear Wheel Kit - Low profile tyres 11							
19.5" 70° (.ULCATSTF70L) 80° (.ULCATSTF80L) 90 Hanger (please specify): 5" 6" 7" 8" 90° (.ULCATLEG90NAVY) 12" 13" 14" 90° with Extension (ULCATLEG90EXTNAVY)	Rear wheel kit (KIEXPWHL02) Includes the following: • Spinergy spox black 24" • Low profile - Schwalbe Marathon Plus Evolution 1" • Natural fit LT omit thumb grip 24" Maxx Spoke Low Profile Schwalbe Marathon Plus natural fit LT omit thumb grip (KI119391) Plastic coated push rim (KI112821)							
with 6 x 1.5" Castors .ULCATFSH21 (use same code for all options below)	Std aluminum push rim (KI200349) Thumb grip regular (KI100795) Natural fit standard (KI100793)							
19.5" 20" 21" 21" with 6 x 1.5" Castors	Camber 12 0°□ 4°							
.ULCATFSH16) .ULCATFSH165 (use same code for all options below)	Centre of Gravity 13 Rear Forward							
Armpad 6 Full length arm pad (.ULCATARPF) Residual Limb Support 7 5" x 8" with smooth cover Left (KI502355)□ Right (KI502354) 7" x 10" with smooth cover	PRO Elevated Legrest - Angle Adj. FP- Long 14 16/17 LHS(504526) 16/17 RHS (504534) 18-25 LHS (504527) 18-25 RHS (504543)							
Left (KI502357) Right (KI502356)								

Opti	tional Specifications	
	Accessories	
Composite side guards (not used with armrests) □ (.ULCATSDGC)	Clear spoke guards (.ULCATSPGCL24)	
Black neoprene impact guards (.ULCATIMG)		
	Notes	